

LK-1910
LK-1920 (With intermediate presser)
 Computer-controlled, High-speed Shape-tacking Machine
 [Sewing area : 60mm (L) × 100mm (W)]

JUKI



Pursuing both the highest-level productivity and excellent operability



LK-1920

LK-1910
LK-1920

SPECIFICATIONS

Model name	LK-1910		LK-1920	
	Medium-weight	Heavy-weight	Medium-weight	Heavy-weight
Application	Medium-weight	Heavy-weight	Medium-weight	Heavy-weight
Max.sewing speed	2,500 sti/min* (when stitch length is 3mm or less)			
Sewing area	60mm (L) × 100mm (W)			
Stitch length	0.1mm~10mm (0.1mm step)			
Needle bar stroke	41.2mm			
Lift of the feeding frame	Max. 22mm (electromagnetic) / Max. 25mm (pneumatic)			
Lift of the intermediate presser	—		18mm	
Stroke of the intermediate presser	—		Standard 4mm (0mm and 4mm~10mm)	
Needle	DP×5 (#14)	DP×17 (#18)	DP×5 (#14)	DP×17 (#18)
Hook	Double-capacity shuttle hook			
Feed motion work clamp foot	Max.20,000 stitches			
Standard sewing patterns	No.50, No.51, No.52			
Number of patterns that can be input	200 patterns			
Enlarging / Reducing facility	20~200% (1% step), (by increasing the stitch length)			
Bobbin thread counter	Provided as standard (Up / down method)			
Memory medium	Memory/EEP-ROM			
Lubricating oil	JUKI New Defrix Oil No.2 (equivalent to ISO VG32)			
Sewing machine motor	AC servomotor (direct-drive system)			
Power consumption	Single-phase, 3-phase 200~240V / 380VA			
Weight	Machine head (include motor) 46kg, control box 5kg			

sti/min stands for "Stitches per Minute."

WHEN YOU PLACE ORDERS

Machine head / Control box

Model	Code	Feeding frame	Code	Power supply	Code
Intermediate presser		Magnet-driven feeding frame	S	3-phase 200~240V	D
Not provided	10	Pneumatic separately driven feeding frame	A	Single-phase 200~240V	K
Provided	20			Single-phase 200~240V(CE)	N

Application	Code	Subclass	Code	Specification	Code	Pedal switch*	Code
Medium-weight	S	Standard	5000	LK-1910□S:magnet-driven feeding frame	1	1-pedal unit	F
Heavy-weight	H	Subclass	5001~	LK-1910□A:Pneumatic separately driven feeding frame	2	3-pedal unit	B
		Side wiper	5045*	LK-1920□S:magnet-driven feeding frame	3	PK 3-pedal unit (pk47)	D
				LK-1920□A:Pneumatic separately driven feeding frame	4		

*Sub-class of 5045 is only for LK-1920SS and LK-1920HS

*Select "F" for the magnet-driven feeding frame, select and "B" or "D" for the pneumatic-driven feeding frame.

VIET LE CO, LTD.
 Sewing & Textile machines and Parts

LK19 □ □ □ □ □ □ □ □ Z/MC676 □ □ □

HOTLINE: 0982 085 899

● To order, please contact your nearest JUKI distributor.

JUKI ECO PRODUCTS	The LK-1910,1920 is an eco-friendly product which complies with JUKI ECO PRODUCTS standards for protecting the environment.			
	<ul style="list-style-type: none"> The sewing machine complies with the "Juki Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive. For details of JUKI ECO PRODUCTS, refer to: http://www.juki.co.jp/eco_e/index.html	Registered Organization : JUKI CORPORATION Head Office The Scope of the Registration : The activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.		

JUKI
 JUKI CORPORATION
 SEWING MACHINERY & SYSTEMS BUSINESS UNIT
 2-11-1, TSURUMAKI, TAMA-SHI,
 TOKYO 206-8551, JAPAN
 PHONE : (81) 42-357-2370
 FAX : (81) 42-357-2274
<http://www.juki.com>

* Specifications and appearance are subject to change without prior notice for improvement.
 * Read the instruction manual before putting the machine into service to ensure safety.
 * This catalogue prints with environment-friendly soyink on recycle paper.
 * Paper from responsible sources FSC™ C001712

LK-1910 LK-1920

The sewing speed of 2,500 sti/min is the fastest-level sewing speed among the shape-tacking machines.

The sewing machine has adopted a semi-rotary two-fold capacity hook. In addition, the sewing machine comes with enhanced functions such as the feeding frame with a higher lift and the direct-drive machine head that provides excellent responsiveness and stop accuracy support the machine's high-speed performance, thereby achieving increased productivity.

This sewing machine can be used for a broad range of sewing such as attaching small parts, ruffling curtains and attaching labels.



LK-1910SS(Medium-weight)



LK-1910SS(Medium-weight)



LK-1920HS(Heavy-weight)



LK-1910

Excellent operability

Function-rich easy-to-use operation panel


- Functions such as the sewing speed and bobbin thread counter can be easily set on the operation panel by entering desired setting values. Cycle sewing that combines patterns can be registered. In addition, the automatic correction function eliminates distortion of a pattern when enlarging or reducing it.
- Standard sewing patterns can be assigned to pattern keys P1 to P50. Any of the sewing patterns assigned to the P1 to P25 pattern keys can be activated with a touch of the corresponding key. This means that workability is improved by assigning 25 sewing patterns that are most frequently used to those pattern keys.
- As many as 99 different cycle sewing patterns, each of which combines a maximum of 99 different sewing patterns, can be stored in the memory.



Option Programming software for computer-controlled sewing machines

Use the pattern creation software PM-1 (separately available) to create pattern data. With the PM-1, data can be created with ease using the general-purpose personal computer.

System Formation

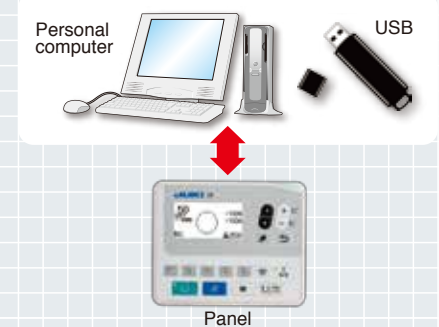

Higher productivity

The highest-level sewing speed of 2,500 sti/min is achieved.

The sewing machine achieves the highest-level sewing speed, 2,500 sti/min, among shape-tacking machines, contributing to the achievement of shortened cycle time.

Frequency of bobbin thread changing is decreased.

The sewing machine is provided as standard with a semi-rotary, two-fold capacity hook. As a result, the frequency of handsome replacement of bobbin thread is decreased. In addition, this hook allows the sewing machine to demonstrate its capability of sewing with thick thread.


Sewing capability is improved.

The range of applicable count of thread is widened to improve responsiveness to the sewing of heavy-weight materials. This improvement contributes to the enhancement of sewing capability. The sewing machine comes in two different types, i.e. the midium-weight materials sewing type (S) and the heavy-weight materials sewing type (H). You may select either one according to the application.

Excellent responsiveness

Sewing area that supports a broad range of applications

The sewing machine is provided with a wide sewing area of 60 mm (length) × 100 mm (width). As a result, the sewing machine responds to a wider range of applications such as attaching name labels and small parts, ruffling curtains, sewing ends of jeans belts and attaching labels.



Intermediate presser that securely clamps the material <LK-1920>

The machine is provided as standard with an intermediate presser to prevent the material from flopping, thereby promising beautiful seams. Since height and stroke of the intermediate presser can be adjusted, quick responsiveness to changes in material thick or th number of layers materials is ensured.



The feeding frame type can be selected to match the use of the machine in your work

Two different feeding frame types are available, i.e., the monolithic type (magnet-driven) and the separately-driven type (pneumatically-driven) that has separate right and left frames. You may select the best-suited type of the feeding frame according to the application and work.

*The monolithic type (magnet-driven) is provided with the manual pedal that allows the feeding frame to be lifted/lowered according to how the pedal is depressed.



LK-1920(Pneumatic separately driven feeding frame)

VIET LE CO., LTD.
Sewing & Textile machines and Parts

HOTLINE: 0982 087 800

Optional devices is available for handling the machine's wide range of processes and applications.

Pneumatic invertd clamp device

FC02L



The device is best-suited to attaching small articles such as labels and emblems by sewing the entire circumference.

Needle cooler

PART No. 142-25056*



The needle cooler blows air to the needle, thereby preventing thread breakage caused by hot needles.

Thread tension controller No.3

PART No. B0519-222-0B0*



The tension controller unit used to partially change the needle thread tension during the sewig of a pattern.

- *The following parts are necessary when using the thread tension controller No.3.
- Air tube (Part No. BT-0400251-EB)
 - Solenoid valve (Part No. PV-1502090-00)
 - Solenoid valve connector assembly (Part No. 142-04754)

1-pedal unit for stading work PK-57

PART No. GPK-570010B0

*The following parts are necessary when using the 1-pedal unit.

- Junction cable (Part No. M9013-590-0A0)

Blank material for the feed plate for feeding frame

The blank material for machining is provided.

PART No.

- B2553210D0A (Monolithic feeding flame blank with knurl)
- B2553210D0B (Monolithic feeding flame blank without knurl)
- B2554210D0B (Separately driven feeding frame blank without knurl(right))
- B2554210D0C (Separately driven feeding frame blank without knurl(left))
- B2554210D0A (Separately driven feeding frame blank without knurl)
- 142-24000 (Feed plate with knurl)
- 142-24109 (Feed plate without knurl)

Options with asterisks() can be mounted to machines equipped with pneumatic separately driven feeding frames ("Feeding flame type : A" in "When you place orders").